

Medium Pressure

HOK 65/120 1CT

Medium Pressure Mercury lamps are available in a wide range with an arc length between 10 and 140 centimeter. The lamps can be fitted with various types of end fitting from our catalogue, or equipped with customer special fittings, cables or pins. The lamps are made from selected types of quartz glass, with transmission characteristics tailored to the application. Medium Pressure Mercury lamps contain sophisticated quantities of mercury bromides, providing a self-cleaning halogen cycle, to control the depreciation of UV radiation over lamp life.

Product data

• General Characteristics

Cap-Base	SK32
Cap-Base Information	Cable 250mm
Execution	-
Operating Position	p10
Main Application	Industrial UV
Run Time	0.083 (max) hr

• Electrical Characteristics

Lamp Wattage	5000 W
Lamp Wattage Technical	7800 W
Lamp Voltage	780 (min), 840 (nom), 900 (max) V
Lamp Current	10.3 A
Ignition Time	10 (max) s
Re-ignition Time	10 (max) min
Consumed Watt per cm	120 W/cm

• Product Dimensions

Overall Length C	717 (max) mm
Diameter D	24 (max) mm

Arc Length O	650 mm
--------------	--------


• Luminaire Design Requirements

Pinch Temperature	300 (max) C
Bulb Temperature	600 (min), 900 (max) C

• Product Data

Order code	928189205104
Full product code	928189205104
Full product name	HOK 65/120 1CT
Order product name	HOK 65/120 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8711500193636
Bar code on outerbox - EAN3	8711500193643
Logistic code(s) - 12NC	928189205104
Net weight per piece	0.225 kg

Dimensional drawing





HOK /80 SK32

Product	C (Max)	D (Max)	O (Norm)
HOK 65/120	735.4	21.92	650



Photometric data

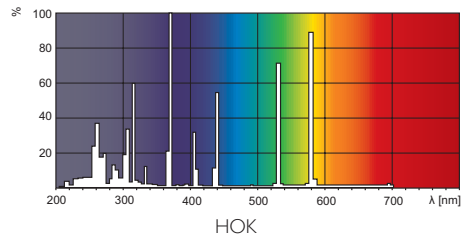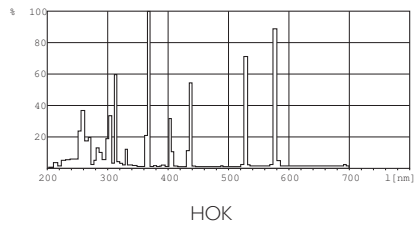

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, August 26
data subject to change