Actinic BL PL-L Secura

PL-L 36W/10/4P SECURA 1CT/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL PL-L Secura lamps are perfect for attracting insects. With the compact PL-L product format in a variety of wattages, new attactive designs are possible. Furthermore, these lamps have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

Product data

General Information

Cap-Base	2G11 [2G11]
Main Application	SECURA (SE)
Life to 50% Failures (Nom)	10000 h

Light Technical

Color Code	10
Chromaticity Coordinate X (Nom)	228
Chromaticity Coordinate Y (Nom)	215
UV Depreciation at 2000 h	20 %
UV Depreciation at 5000 h	40 %

Operating and Electrical

Power (Rated) (Nom)	36 W
Lamp Current (Nom)	0.440 A

Voltage (Nom)	108 V

Mechanical and Housing

Cap-Base Information	4 Pins

Approval and Application

Mercury (Hg) Content (Max)	2.0 mg
Mercury (Hg) Content (Nom)	1.8 mg

UV

UV-A Radiation 100Hr (IEC)	7.7 W

Product Data

Full product code	871829119443900
Order product name	PL-L 36W/10/4P SECURA 1CT/25
EAN/UPC – Product	8718291194439

Actinic BL PL-L Secura

Order code	927909121001
Numerator – Quantity Per Pack	1
Numerator – Packs per outer box	25
Material Nr. (12NC)	927909121001

Net Weight (Piece)	133.000 g

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
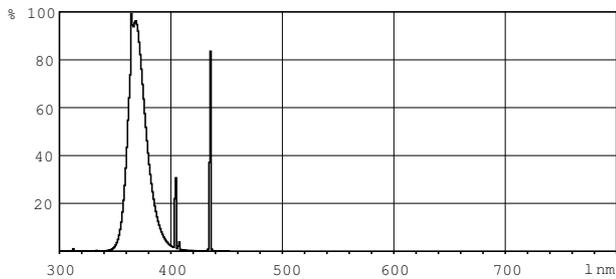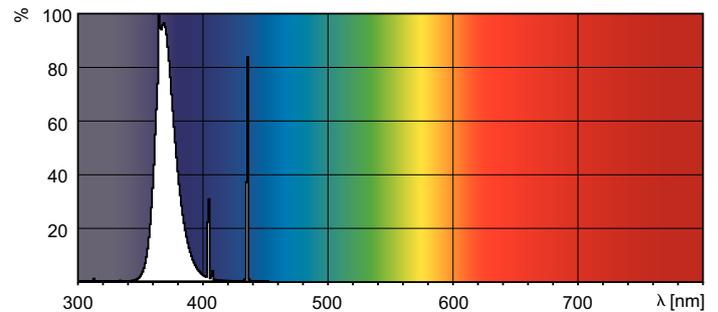
Dimensional drawing
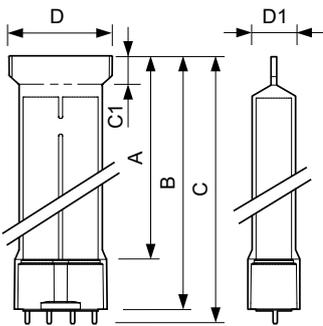
PL-L 36W/10/4P SECURA

Product	D1 (max)	D (max)	C1	A (max)	B (max)	C (max)
PL-L 36W/10/4P SECURA 1CT/25	27 mm	40 mm	20.0 mm	404.2 mm	430.0 mm	436.6 mm

Photometric data

Lightcolor /10, /110 & /210

Lightcolor /10, /110 & /210