



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL 40W/10 SLV/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers


Product data

General Information		Voltage (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	101 V	
Main Application	Insect traps	Approval and Application	
Life to 50% Failures (Nom)	9000 h	Mercury (Hg) Content (Nom)	13.0 mg
Useful Life (Nom)	5000 h	UV	
System Description	Rapid Start	UV-B/UV-A (IEC)	0.2 %
Light Technical		UV-A Radiation 100Hr (IEC)	10.0 W
Color Code	10	UV-A Radiation 0Hr (IEC)	12.4 W
Color Designation	Actinic	Product Data	
Chromaticity Coordinate X (Nom)	222	Full product code	871150026026000
Chromaticity Coordinate Y (Nom)	210	Order product name	Actinic BL TL 40W/10 SLV/25
UV Depreciation at 2000 h	20 %	EAN/UPC - Product	8711500260260
UV Depreciation at 5000 h	40 %	Order code	928011301020
Operating and Electrical		Numerator - Quantity Per Pack	1
Power (Nom)	39 W	Numerator - Packs per outer box	25
Lamp Current (Nom)	0.43 A	Material Nr. (12NC)	928011301020

Actinic BL TL(-K) / TL-D(-K)

Net Weight (Piece) 292.000 g


Dimensional drawing



Product	D (max)	A (max)	B	C (max)
Actinic BL TL 40W/10 SLV/25	37.25 mm	1198.4 mm	1205.4 mm	1212.4 mm

TL 40W/10 RS

Photometric data

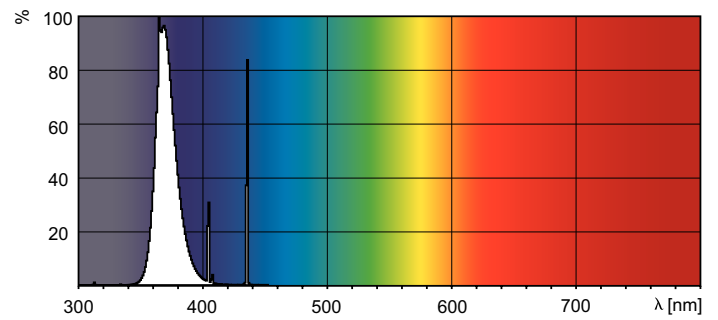

XDPO_XUVATLRS_10-Spectral power distribution Colour

