



# MSR Gold™ FastFit

## MSR Gold™ 1500/2 FastFit

All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold™ FastFit can be operated in a lamp wattage range between 700W and 2500W.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information		Luminous Efficacy (rated) (Nom)		77 lm/W	
Cap-Base	PGJX50 [ PGJX50]	Color Rendering Index (Nom)		77	
Operating Position	UNIVERSAL [ Any or Universal (U)]	Operating and electrical			
Main Application	Entertainment	Power (Nom)	1500 W		
Life to 50% Failures (Nom)	750 h	Lamp Current (Nom)	16.1 A		
System Description	FastFit	Ignition Supply Voltage (Min)	198 V		
Light technical		Controls and dimming			
Luminous Flux (Nom)	116000 lm	Dimmable	Yes		
Chromaticity Coordinate X (Nom)	302				
Chromaticity Coordinate Y (Nom)	320				
Correlated Color Temperature (Nom)	7200 K				

# MSR Gold™ FastFit

## Mechanical and housing

Cap-Base Information	PGJX50
----------------------	--------

## Luminaire design requirements

Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	500 °C
Pinch Temperature (Max)-DUP(do not use)	500 °C

## Product data

Full product code	871869962595500
-------------------	-----------------

Order product name	MSR Gold™ 1500/2 FastFit
EAN/UPC - Product	8718699625955
Order code	928410305115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928410305115
Net Weight (Piece)	0.133 kg


## Dimensional drawing




Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Gold™ 1500/2 FastFit	28 mm	6.3 mm	64 mm	66 mm	65 mm	128 mm	50 mm

## MSR Gold™ 1500/2 FastFit

## Photometric data

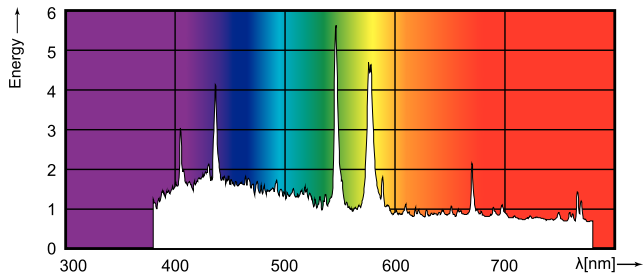

Spectrum MSR Gold™ 1500 FastFit

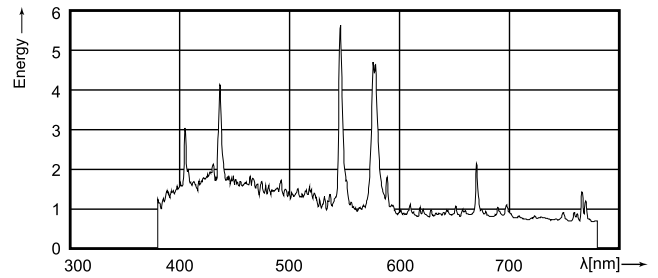

Spectrum MSR Gold™ 1500 FastFit

