



Saving Slim

SAVING SLIM 120 IP66 38W 4K



Compact LED ceiling light, waterproof IP66, with an opal polycarbonate diffusing screen. End caps fitted onto the central body and internal terminal block for quick installation.


CE

Order code 75464

EAN 8002219895547

Technical specifications

Absorbed Power	38 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	4000 K
LED number	126
Colour consistency	SDCM5
CRI color rendering	>80
Ballast	For constant current LED
Efficiency	110 lm/W
Energy class	E
Equivalent power	2x36w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.9
Glow wire strength	850 °C - 30s.
Luminaire flux	4180 lm
Luminous flux L80B20	80000 h
Mounting	Ceiling
Voltage supply range (max)	240 V
Voltage supply range (min)	220 V



W	Dimensioni Dimensions mm		
	L	B	H
18	673	85	70
38	1273	85	70
58	1573	85	70


Installation and applications

Environment	Secondary Areas
Application	Offices, Production, Warehouses

Mechanical specifications

Height	70 mm
Length	1273 mm
Width	85 mm
Weight	1.5 Kg
Colour housing	Grey RAL 7040
Protection grade IP	IP66
Protection grade IK	IK07

Certifications and norms

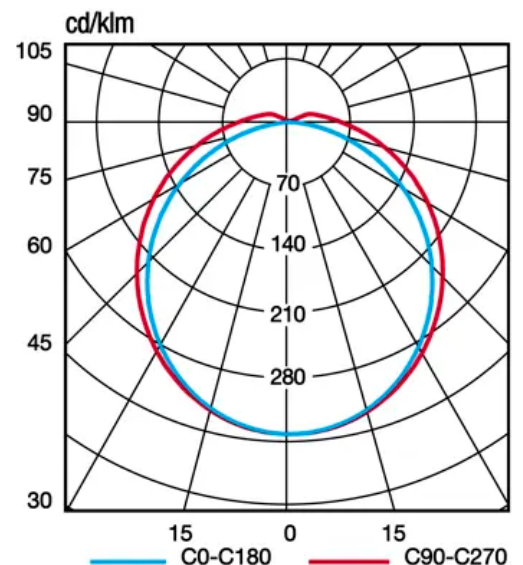

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories



201954000
KIT 2 GANCI SOSPEN ST EASY
LED

Inverter accessories



19398
INV UNIV AT RM 5W 20-240V



15037
MODULO LGFM



19399
INV UNIV CT 5W 20-240V



19371
INV P&L LED SE/SA 3H 60-
180V



15080
MODULO DALI SLIM



RA13
BOOSTER BAT LiFe 6.4V 1.5Ah



15079
MODULO LG SLIM



19367
INV P&L LED SE/SA 1H 60-
180V