



TUV PL-L

TUV PL-L 55W/4P HF 1CT

TUV PL-L lamps are compact UVC (germicidal) lamps used in professional water and air disinfection units. The compact size of the lamp allows for a small system design and design flexibility. TUV PL-L lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Thanks to the single-ended lamp base, lamp replacement is easy.

Product data

• General Characteristics

System Description	High Frequency
Cap-Base	2G11
Cap-Base Information	4 Pins
Bulb	2xT16
Execution	-
Main Application	Disinfection
Useful Life	9000 hr

• Light Technical Characteristics

Color Code	TUV
Color Designation (text)	-

• Electrical Characteristics

Lamp Wattage	55 W
Lamp Wattage Technical	55 W
Lamp Voltage	103 V
Lamp Current	0.54 A

• UV-related Characteristics

UV-C Radiation	17.0 W
----------------	--------

• Product Dimensions


Base Face to Base Face A	505 (max) mm
Insertion Length B	530 (max) mm
Overall Length C	535 (max) mm
Diameter D	38 (max) mm
Diameter D1	18 (max) mm

• Product Data

Order code	927908704007
Full product code	927908704007
Full product name	TUV PL-L 55W/4P HF 1CT
Order product name	TUV PL-L 55W/4P HF 1CT/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500633798
Bar code on outerbox - EAN3	8711500633804
Logistic code(s) - 12NC	927908704007
Net weight per piece	134.000 gr


PHILIPS

Dimensional drawing

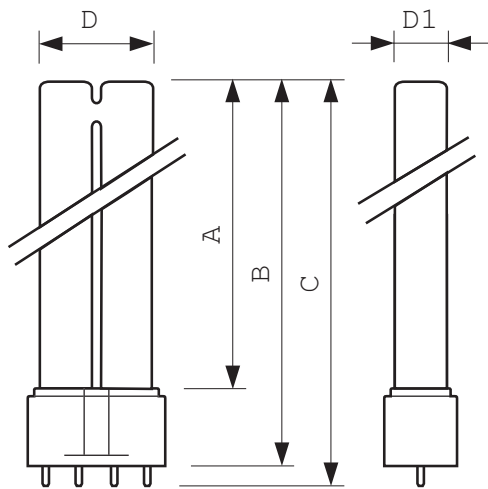


TUV PL-L 55W/4P HF 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
TUV PL-L 55W/4P HF	505	530	535	38	18



2G11

Photometric data

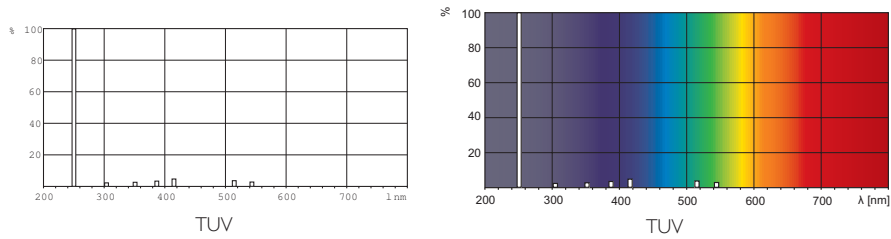

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, November 29
data subject to change