



# TUV T8

## TUV 25W 1SL

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.

### Product data

#### • General Characteristics

System Description	-
Cap-Base	G13 [G13]
Bulb	T26
Main Application	Disinfection
Useful Life	9000 hr

#### • Electrical Characteristics

Rated Lamp Wattage	25 W
Technical Lamp Power	25.5 W
Lamp Voltage	48 V
Lamp Current	0.6 A

#### • Environmental Characteristics

Mercury (Hg) Content	2.0 mg
----------------------	--------

#### • Light Technical Characteristics

Colour Designation	-
--------------------	---

#### • UV-related Characteristics

UV-C Radiation	7 W
----------------	-----


#### • Product Dimensions

Base Face to Base Face A	437.4 (max) mm
Insertion Length B	442.1 (min), 444.5 (max) mm
Overall Length C	451.6 (max) mm
Diameter D	28 (max) mm


#### • Product Data

Order code	641618 40
Full product code	871150064161840
Full product name	TUV 25W 1SL
Order product name	TUV 25W 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500641618
Bar code on outerbox - EAN3	8711500641625
Logistic code(s) - 12NC	928039404005
Net weight per piece	67.000 gr



## Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TUV TL-D 25W	437.4	442.1	444.5	451.6	28



## Photometric data

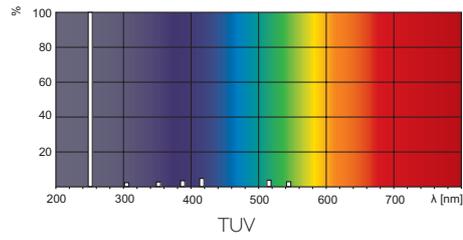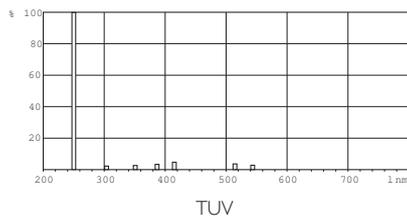

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, May 17  
data subject to change