



TUV T5

TUV 24T5 HO G5

TUV T5 lamps are single- or double-ended UV-C 253.7 nm emitting lamps. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. TUV T5 lamps offer constant UV output over their complete lifetime.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Plants and/or materials that are exposed to UV-C and/or ozone for a long time may become damaged and/or discolored.

Product data


General information		Voltage (Nom)	
Cap-Base	G5	77 V	
Main Application	Disinfection	Mechanical and housing	
Useful Life (Nom)	9000 h	Bulb Shape	T16
System Description	High Output	Approval and application	
Light technical		Mercury (Hg) Content (Nom)	5.5 mg
Color Code	TUV	UV	
Color Designation	- [Not Specified]	UV-C Radiation at 100 hr	18 W
Depreciation at Useful Lifetime	15 %	Product data	
Operating and electrical		Full product code	871951441320700
Power (Nom)	61 W	Order product name	TUV 24T5 HO G5
Lamp Current (Nom)	0.8 A	EAN/UPC - Product	8719514413207

TUV T5

Order code	927928304014
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927928304014

Net Weight (Piece)	61.000 g
--------------------	----------

Dimensional drawing

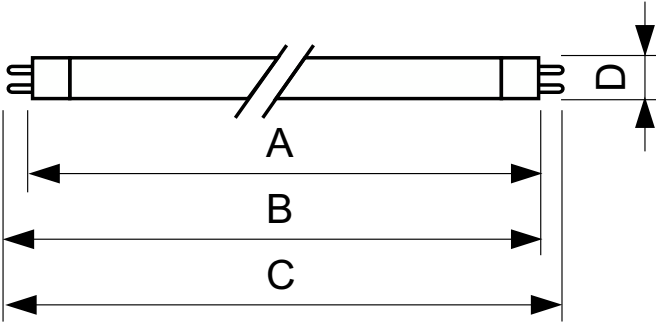

TUV 24T5 HO G5

Product	D	C
TUV 24T5 HO G5	16.0 mm	675.2 mm

