



# TUV T5

## TUV 64T5 HE G5 UNP 40

TUV T5 lamps are single- or double-ended UV-C 253.7 nm emitting lamps. The small 16 mm diameter of the lamp allows for a small system design and design flexibility. TUV T5 lamps offer constant UV output over their complete lifetime.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- DANGER: Risk Group 3 Ultra Violet product. These lamps emit high-power UV radiation that can cause severe injury to skin and eyes. Avoid eye and skin exposure to unshielded product. Use only in an enclosed environment which shields users from the radiation.
- Plants and/or materials that are exposed to UV-C and/or ozone for a long time may become damaged and/or discolored.

### Product data


General information		Voltage (Nom)	
Cap-Base	G5	97 V	
Main Application	Disinfection	Mechanical and housing	
Useful Life (Nom)	9000 h	Cap-Base Information	G5
System Description	High Efficiency	Bulb Shape	T16
Light technical		Approval and application	
Color Code	- [ Not Specified]	Mercury (Hg) Content (Nom)	3.0 mg
Color Designation	- [ Not Specified]	UV	
Depreciation at Useful Lifetime	15 %	UV-C Radiation at 100 hr	32 W
Operating and electrical		Product data	
Power (Nom)	75 W	Full product code	871951434643700
Lamp Current (Nom)	0.425 A	Order product name	TUV 64T5 HE G5 UNP 40

## TUV T5

EAN/UPC - Product	8719514346437
Order code	928000404024
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40

Material Nr. (12NC)	928000404024
Net Weight (Piece)	132.000 g

### Dimensional drawing

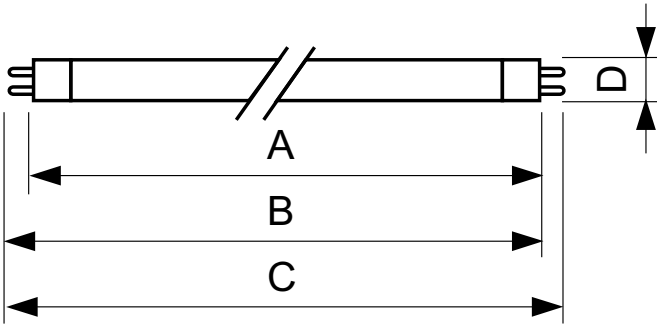

TUV 64T5 HE G5 UNP 40

Product	D	C
TUV 64T5 HE G5 UNP 40	16 mm	1538.8 mm

