



CODE

EAN

37560


PRIMA LED TUBE 2x150 PC

8590515375608



- Degree of protection: IP66
- Ambient temperature: -25–35 °C
- Impact strength: IK10
- Life time: 50000 hours
- System efficacy: 93 lm/W
- Chromaticity tolerance (initial MacAdam): SDCM3
- Cable glands: rubber (SBS)
- Protection class: I

- Body: Grey PC (high mechanical resistance, UV stability, RAL 7035)
- Diffuser: Clear PC (high mechanical resistance, UV stability)
- Reflector: Steel sheet, white (RAL 9003)
- Clips: Polyamide + 15 % fibreglass
- Sealing: Polyurethane (PUR), foam-filled base groove
- Connection: Screwless three-pole terminal block
- Luminaire for indoor and covered outdoor industrial spaces intended for retrofitting an existing lighting system (LED TUBE)
- Total luminous flux and electric energy consumption are calculated using Osram SubstiTUBE T8 EM Value sources
- Optimal mounting height: 3 to 8 m

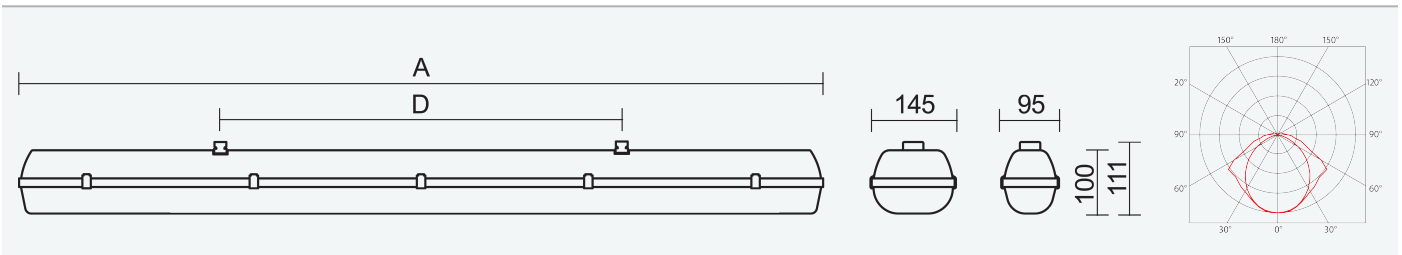

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]	A [mm]	D [mm]
37560	PRIMA LED TUBE 2x150 PC	35	4000	3560	38,2	93	2,5	1572	940

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD



